


## 260-7010

## Watertight Fittings For Any Round & Rigid Pipes

PATENTED

Metric

G (PF)

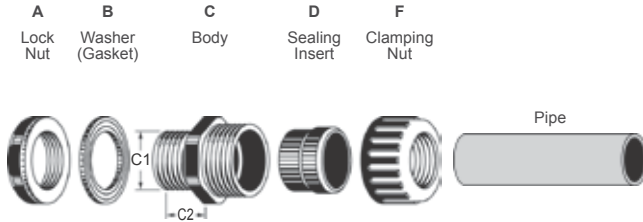

- Thread Type : Metric and G ( PF ).
- Material Data : Halogen-free Nylon PA 66 ( Flammability UL 94V-2 ) for A.C.F parts. Weather-resistant EPDM rubbers for B.D parts.  
*Our black fittings are suitable for outdoor use have been subjected to UV light exposure and water immersion same as UL746C (f1) rating. UV ( Irradiance 340 nm ) exposure is performed by using a xenon-arc weatherometer for 1000 hours and intermittent exposure to water spray.*
- IP Protection : IP68.
- Working Temp. : - 40 °C to 105 °C ( - 40 °F to 221 °F ). Short-Term to 160 °C ( 320 °F ).
- Application : With AVC's special compression design by an unique integrated insert, this Fitting provides watertight or sealing solution on the rigid-round pipes for an wide applications.
- The **Washer ( Gasket )** and **Lock Nut** are all included in each Watertight Fitting, this saves additional ordering work and storage spaces.
- Contact us for specially ordering AVC Water / Oil tight Pipe Fittings with NBR or Viton rubber material for specific oil resistant applications. ( MOQ is required )

Thread	Cat. No.			Accommodated Pipe Sizes	Thread O. D. C1 mm	Panel Mounting Hole mm	Thread Length C2 mm	Body Min. I. D. mm	Std. Pkg. pcs	
	Sizes	Black RAL 9005	Light Grey RAL 7035							
M50 X 1.5	R - MGW50 - 10	B	G	1 1/4 "	50	50 ~ 50.4	22	41	10	
	R - MGW50 - 12	B	G	1 1/2 "	50	50 ~ 50.4	22	41	10	
M63 X 1.5	R - MGW63 - 12	B	G	1 1/2 "	63	63 ~ 63.4	25	51	10	
	R - MGW63 - 16	B	G	2 "	63	63 ~ 63.4	25	51.5	10	
M90 X 2	R - MGW90 - 24	B	G	3 "	90	90 ~ 91	25	79	2	
G ( P F )	1 1/2	R - FGW48 - 10	B	G	1 1/4 "	47.803	48 ~ 48.4	20	41	10
		R - FGW48 - 12	B	G	1 1/2 "	47.803	48 ~ 48.4	20	41	10
	2	R - FGW60 - 12	B	G	1 1/2 "	59.614	60 ~ 60.4	20	51	10
		R - FGW60 - 16	B	G	2 "	59.614	60 ~ 60.4	20	51.5	10
	3	R - FGW88 - 24	B	G	3 "	87.884	88 ~ 89	25	78	2